

Industrial / Spectacles / 5X8

5X8 - Contrast

Code: 5X8.03.00.03

Date: 14-09-26 1/2

The 5X8 represents the essence of protective eyewear. The innovative SoftPad technology combines to the excellent coverage of the eye area and the angle adjustment of the temples for exceptional comfort and stability. The range of lenses and treatment is complete and highly performing to meet the protection needs of several working environments.



Frame mark (EU)

U EN166 FT CE

Lens mark (EU)

2C-1.2/5-1.4 U 1 FT KN CE

Frame technology

Adjustment of temples in length, Adjustment of temples in inclination, Rubber Terminal, Terminal tilting movement, SoftPad

Conditions of use

Cloud, Fog

Lens technology

Anti-Scratch + Anti-Fog (KN - Vanguard PLUS), UV400

Lens color

Yellow

Lens material

Polycarbonate

Frame color

Black/Orange

Standards

EN166, EN170, EN172

Scale number

(2C-1.2), (5-1.4)

Mechanical resistance

Low energy impact (F)

Optional requirements

Resistance to surface damage by fine particles (K), Resistance to fogging of oculars (N), Protection against high speed particles at extreme temperatures -5°/+55° C (T)


Optical class

Optical class (1)

Weight

29g

>> <https://www.univetsafety.com/en/products/safety/spectacles/5x8/5x8-contrast/>

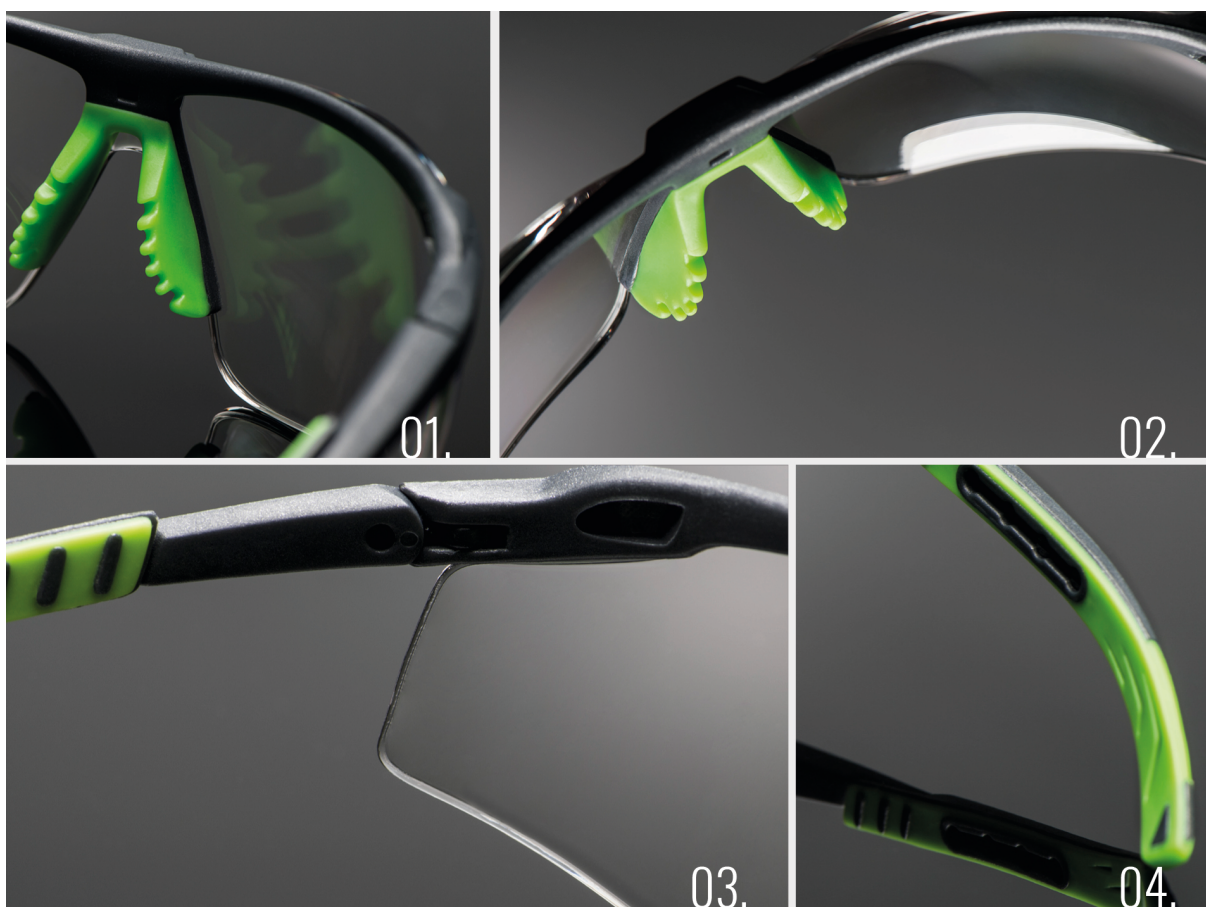

01.

RUBBER NOSE PAD

Enhances comfort and a better stability

02.

ENVELOPING LENS

Sporty design and excellent side protection

03.

INCLINATION AND LENGTH ADJUSTMENT

Allows the correct fitting and to work in constant safety

04.

RUBBER TERMINAL WITH TILTING MOVEMENT

Allows the glasses to adhere to the temples for a perfect grip

Attention! Any images on this page illustrate the frame technologies of the product family in question and may represent frame and lens colours that do not correspond to the product code of the following sheet.

HEADQUARTERS

Univet S.r.l. Via Giovanni Prati 87 25086 Rezzato - Telephone 030 2499411 - Fax 030 2499430 - info@univetsafety.com
VAT. IT02506570163