

Industrial / Spectacles / 5X9

5X9 - Clear 2

Code: 5X9.03.00.00

Date: 15-09-26

1/2

The two-lens structure of the model 5X9 permits to provide the device with alternative materials to polycarbonate lenses, offering protection to a greater number of professional fields. The integrated flip-up perfectly combines with the glasses forming a unique modular system for maximum flexibility of use, made possible by the wide range of filters in the catalogue.



Frame mark (EU)

U EN166 FT CE

Lens mark (EU)

2C-1.2 U 1 FT K N CE

Frame technology

Adjustment of temples in length, Adjustment of temples in inclination, Rubber Terminal, Terminal tilting movement, SoftPad, Flip-up

Conditions of use

Standard brightness, Low brightness

Lens technology

Anti-Scratch (K), Anti-Fog (N), UV380

Lens color

Clear

Lens material

Polycarbonate

Frame color

Gunmetal/Green

Standards

EN166, EN170

Scale number

(2C-1.2)

Mechanical resistance

Low energy impact (F)

Optional requirements

Resistance to surface damage by fine particles (K), Resistance to fogging of oculars (N), Protection against high speed particles at extreme temperatures -5°/+55° C (T)


Optical class

Optical class (1)

Weight

35g polycarbonate version, 41g CR39, 45g glass version

>> <https://www.univetsafety.com/en/products/safety/spectacles/5x9/5x9-clear-2/>

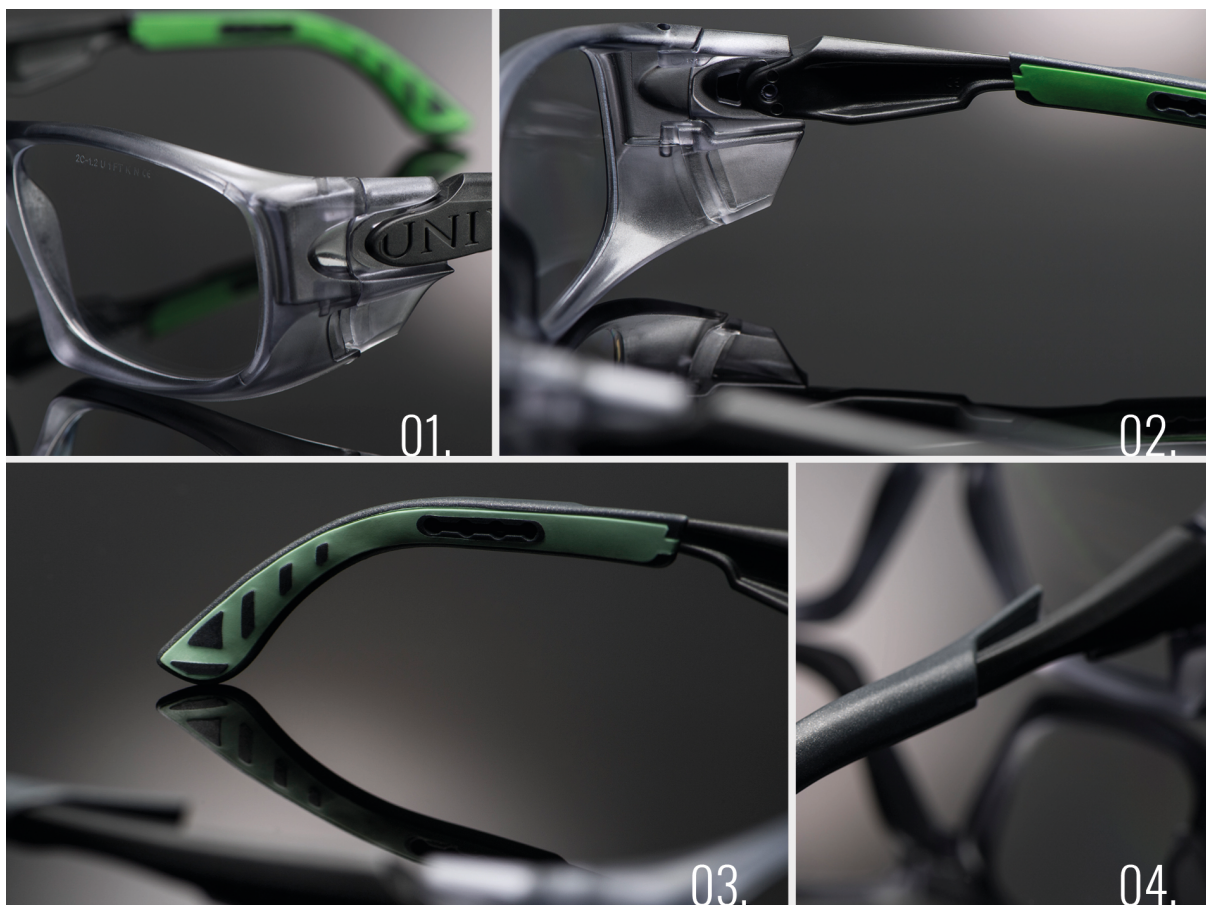

01.

SIDE SHIELD WITH VENTILATION SYSTEM

Increases the level of peripheral protection while reducing the risk of fogging, thanks to a ventilation vent

02.

INCLINATION ADJUSTMENT

Allows to adjust the height of the glasses to ensure maximum optical quality

03.

RUBBER TERMINAL WITH TILTING MOVEMENT

Allows the glasses to adhere to the temples for a perfect grip

04.

LENGTH ADJUSTMENT

Allows to obtain the correct fit and work in constant safety

Attention! Any images on this page illustrate the frame technologies of the product family in question and may represent frame and lens colours that do not correspond to the product code of the following sheet.

HEADQUARTERS

Univet S.r.l. Via Giovanni Prati 87 25086 Rezzato - Telephone 030 2499411 - Fax 030 2499430 - info@univetsafety.com
VAT. IT02506570163